



US005829501A

United States Patent [19]

[11] Patent Number: **5,829,501**

DeVito

[45] Date of Patent: **Nov. 3, 1998**

[54] **COMPLETE WORKSTATION**

[76] Inventor: **Joseph A. DeVito**, 2141 Willow St., Wantagh, N.Y. 11793

[21] Appl. No.: **794,184**

[22] Filed: **Feb. 3, 1997**

[51] **Int. Cl.⁶** **B27M 1/00**

[52] **U.S. Cl.** **144/286.1**; 108/35; 108/92; 108/96; 108/99; 108/162; 144/286.5; 144/287; 269/901

[58] **Field of Search** 108/34, 35, 12, 108/28, 92, 93, 96, 99, 162, 179; 144/285, 286.1, 286.5, 287; 53/574; 269/901, 907; 312/258, 277

[56] **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|------------|--------|----------------|-----------|
| D. 349,817 | 8/1994 | Scott et al. . | |
| 1,272,151 | 7/1918 | Torp | 144/286.1 |
| 1,381,682 | 6/1921 | Webster et al. | 144/285 |
| 1,385,046 | 7/1921 | Hardy | 144/285 |


| | | | |
|-----------|---------|-------------------------|-----------|
| 2,725,619 | 12/1955 | Miller | 144/286.1 |
| 2,962,293 | 11/1960 | Malami | 144/286.1 |
| 4,155,386 | 5/1979 | Alessio . | |
| 4,231,453 | 11/1980 | Minor . | |
| 4,555,099 | 11/1985 | Hilton | 269/901 |
| 4,561,336 | 12/1985 | Davis . | |
| 4,564,181 | 1/1986 | Gansel et al. | 269/901 |
| 4,659,154 | 4/1987 | Jenkins . | |
| 4,875,513 | 10/1989 | Skarsten . | |
| 4,909,495 | 3/1990 | Neuenschwander et al. . | |
| 4,969,496 | 11/1990 | Romans . | |
| 5,161,590 | 11/1992 | Otto . | |
| 5,329,979 | 7/1994 | Miller et al. | 144/286.1 |
| 5,383,977 | 1/1995 | Pierce . | |

Primary Examiner—W. Donald Bray
Attorney, Agent, or Firm—Michael I. Kroll

[57] **ABSTRACT**

A complete workstation (10) comprising a workbench (12) and a worktable (14). A facility (16) is for supporting the worktable (14) upon the workbench (12), so that a person (18) can utilize the workbench (12) and the worktable (14) simultaneously.

21 Claims, 3 Drawing Sheets

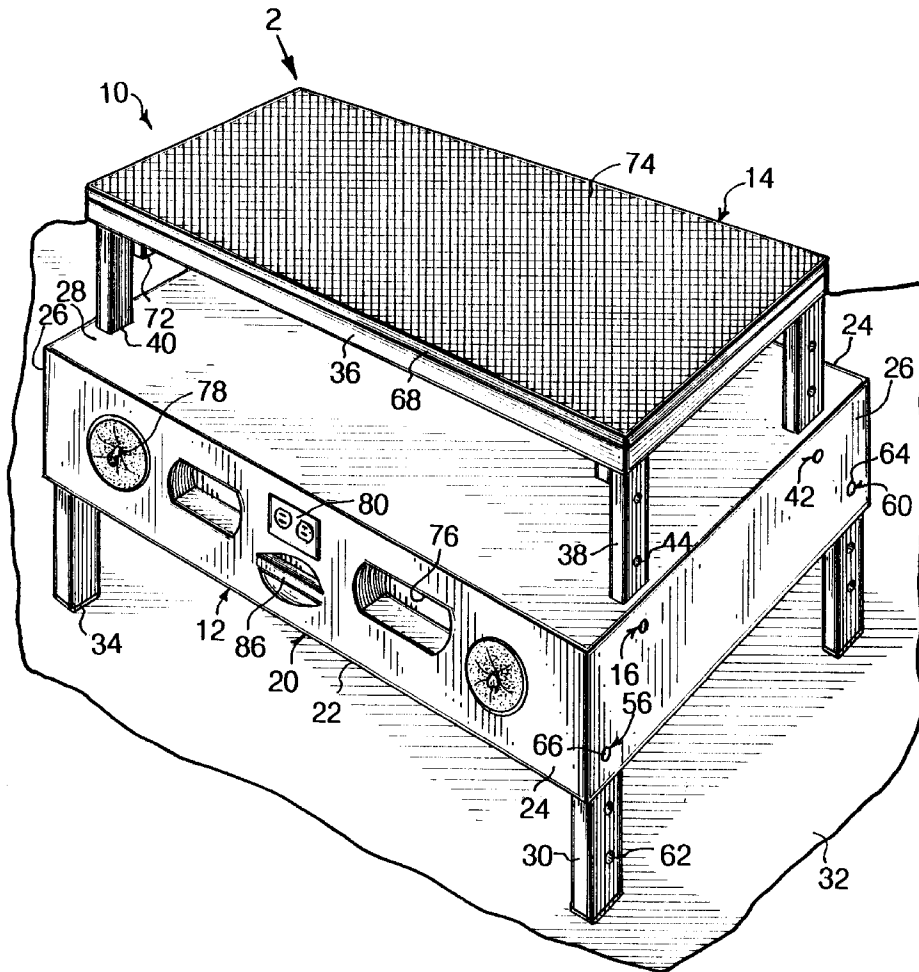

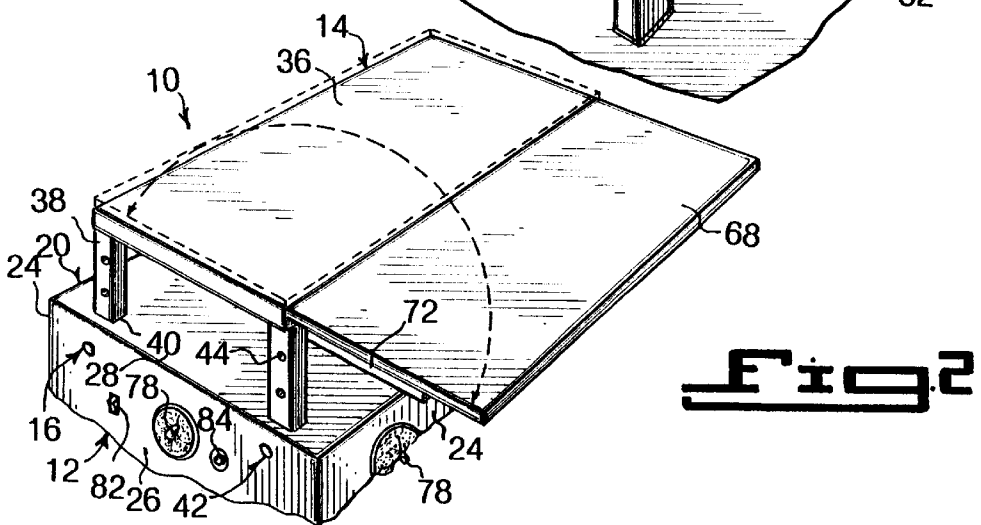
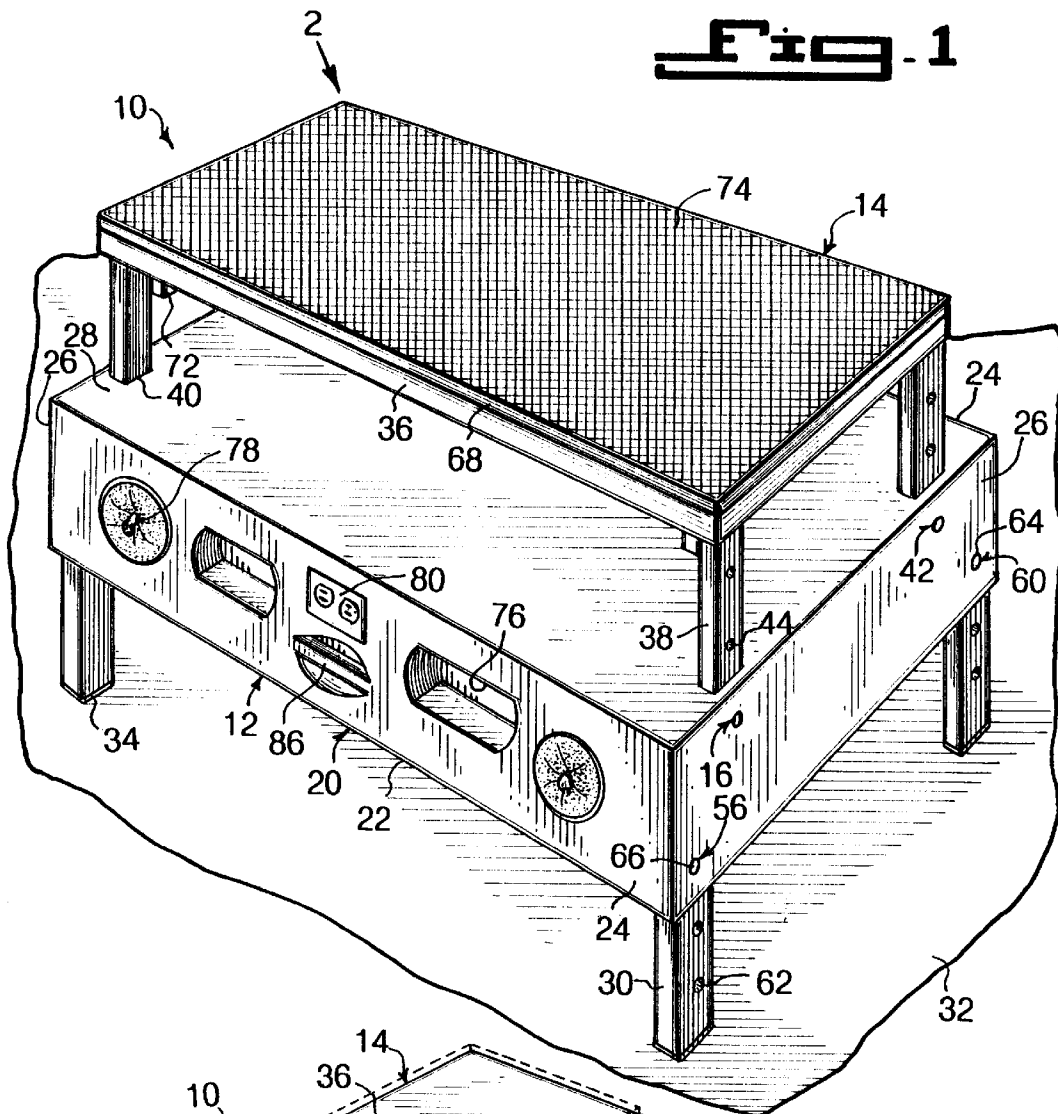


Fig. 3

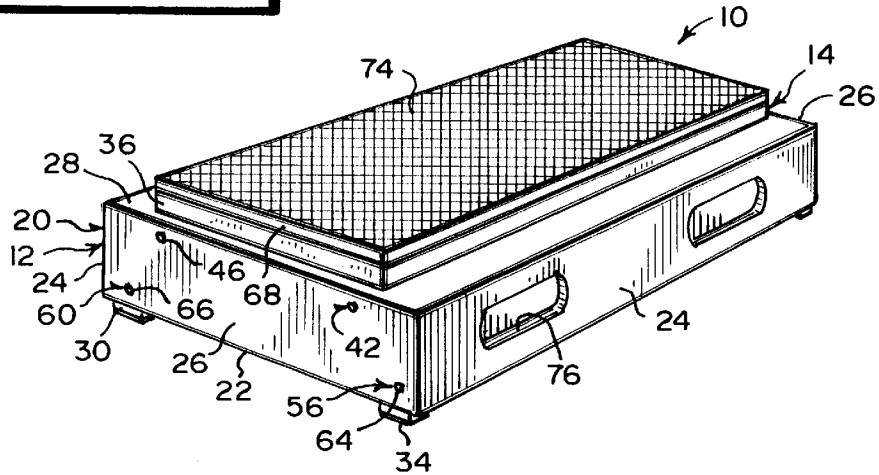


Fig. 4



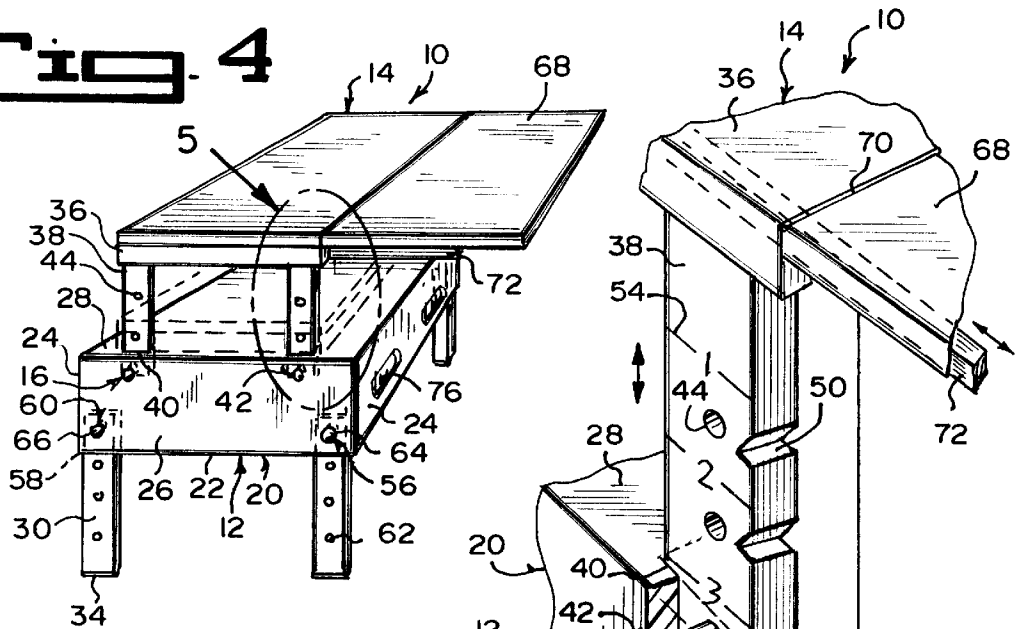


Fig. 5

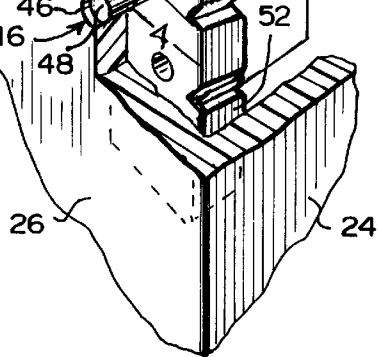

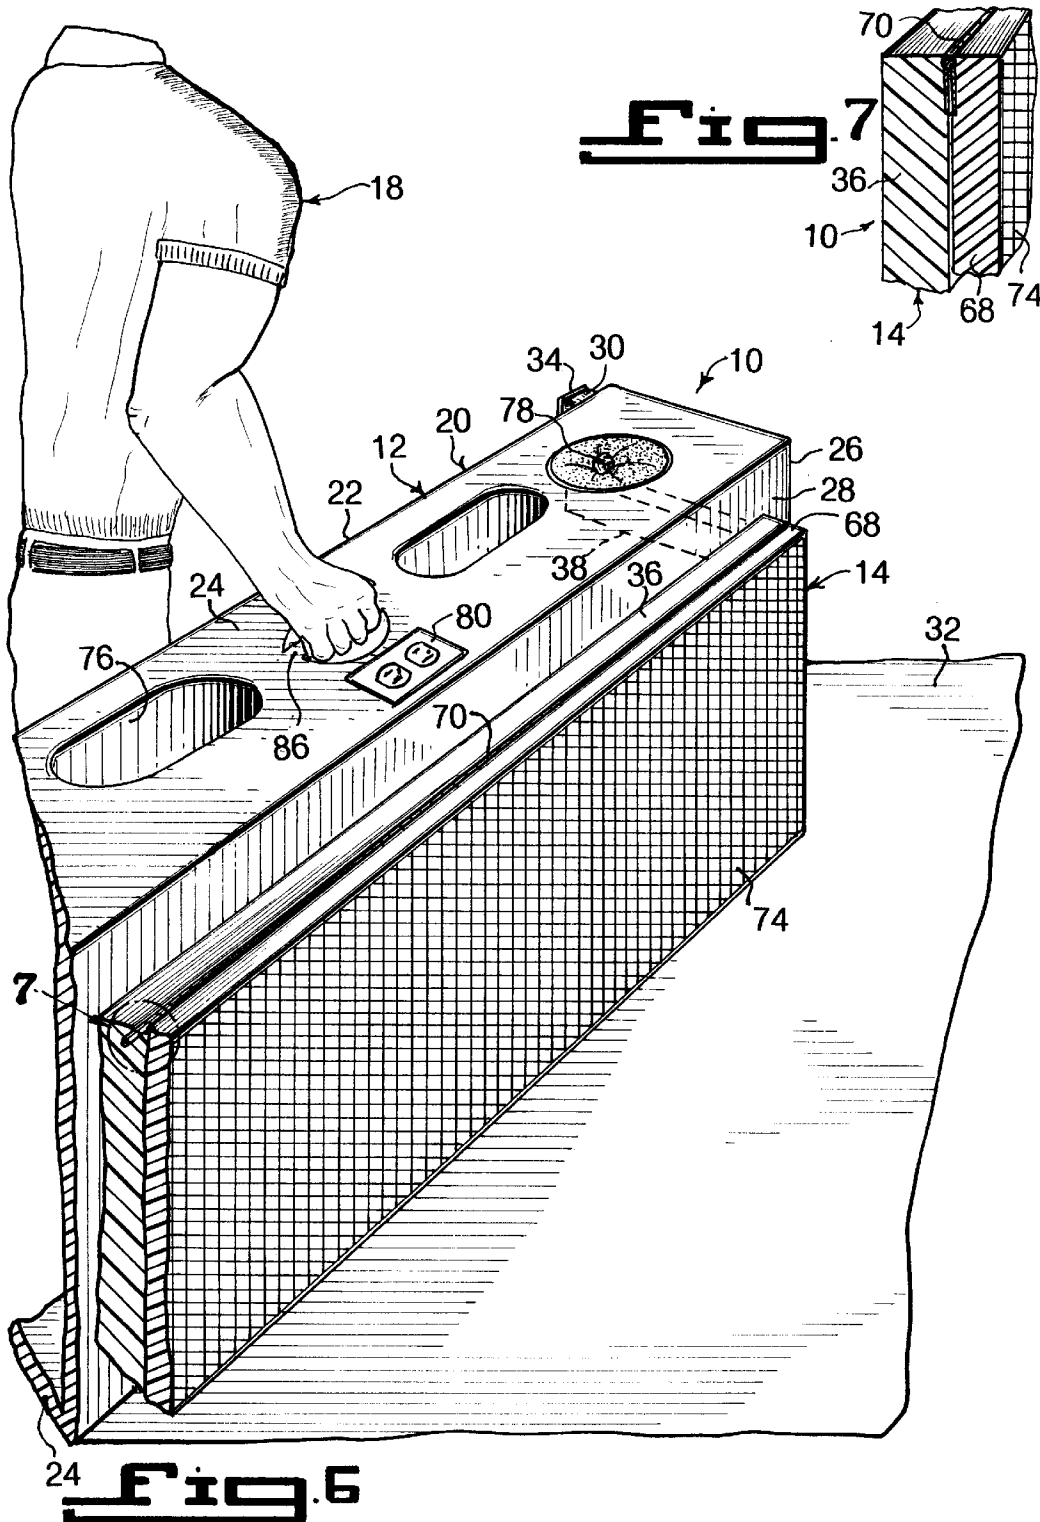

1

COMPLETE WORKSTATION**BACKGROUND OF THE INVENTION**

1. Field of the Invention

The instant invention relates generally to workbenches and more specifically it relates to a complete workstation. The workstation offers a person a variety of options, so as to allow the person to do the total job at one time.

2. Description of the Prior Art

Numerous workbenches have been provided in prior art. For example, U.S. Pat. Nos. 4,155,386 to Alessio; 4,231,453 to Minor; 4,561,336 to Davis; 4,659,154 to Jenkins; 4,875,513 to Skarsten; 4,909,495 to Neuenschwander et al.; 4,969,496 to Romans; 5,161,590 to Otto; 5,383,977 to Pearce and Des. 349,817 to Scott, Jr. et al., all are illustrative of such prior art. While these units may be suitable for the particular purpose to which they address, they would not be as suitable for the purposes of the present invention as heretofore described.

Alessio, Lorenzo E.

FOLDABLE WORKBENCH

U.S. Pat. No. 4,155,386

The invention is directed to a foldable, portable workbench having a worktable and a support structure for supporting the worktable. The support structure includes a pair of mutually spaced leg assemblies and each of these leg assemblies, in turn, includes a pair of legs pivotally connected at one end thereof to the work table. Articulated linkages pivotally interconnect respectively, the two legs of each pair of legs to each other and at least one of the legs to the worktable. The articulating linkages are connected so that the work table and leg structures are stacked in juxtaposition to each other when the workbench is in its folded position and, so that the other ends of the leg structures are spread apart from each other with the worktable substantially transverse to the leg structures when the workbench is in the erected position.

Minor, William F.

COMBINED BOX, TABLE AND BENCH

U.S. Pat. No. 4,231,453

A box is designed in a size and shape which is convenient for holding any suitable equipment, such as camping and picnicking equipment and including such things as a tent and perhaps some simple cooking implements. The box has six panels which fit together in one manner to form a box and in another manner to form a table, which might be a picnic table, a bench and two spools, for example. When the panels are assembled in yet another manner, they form a compact luggage-type unit for easy carrying. A feature of the invention is that all parts are reusable and that the various configurations fit into preexisting geometrical constraints such as the trunks of cars, and the like.

Davis, Harold E.

**PORTABLE UNIVERSAL POWER MITER SAW
WORKBENCH**

U.S. Pat. No. 4,561,336

A portable workbench is constructed so as to accept miter saws of any size in a simple and convenient manner. The

2

workbench comprises a power tool supporting site and a workpiece supporting surface wherein the power tool supporting site and workpiece supporting surface are adjustable in a substantially vertical direction relative to each other.

5 The power tool supporting site and workpiece supporting surface are each constructed of two frames which are adjustable in a substantially horizontal direction, so as to accept any size miter saw on the power tool supporting site.

Jenkins, Jimmy R.

**COMBINED HOBBY CABINET AND
WORKBENCH**

U.S. Pat. No. 4,659,154

15 A combination universal hobby cabinet system, including a workbench, wherein the cooperative combination includes an organized storage cabinet having one member that is completely removable from the cabinet and then becomes a workbench which may be set on top of the closed cabinet or other flat surface, to become a work station. the interior of the cabinet uniquely provides stowage space for materials and tools and for the workbench, all for use in the practice of particular hobbies. One embodiment of which system encompasses the hobby of fly-tying to create fishing lures.

Skarsten, Stephen R.

PORTABLE WORKBENCH

U.S. Pat. No. 4,875,513

20 A portable workbench has two wooden bench top parts mounted on a collapsible support frame. One bench top part has an opening normally covered by a wooden cover plate. To convert the bench into a power tool bench, the cover plate is replaced by an insert plate having a power tool (such as a circular saw) bolted beneath it. The cutting element of the power tool projects through an opening in the insert plate to cut a workpiece supported on the bench top.

Neuenschwander, Charles H., Hopkins, William P.,
Petersen, David A.**WORKBENCH**

U.S. Pat. No. 4,909,495

45 A workbench capable of clamping workpieces of various thicknesses. The workbench includes a laterally disposed worktable mounted on a support structure. A clamping member is provided which includes a clamp positioned above the worktable and configured to clamp a workpiece between the clamp and the worktable. The workbench further includes a foot treadle pivotally mounted on the support structure. A linkage interconnects the foot treadle with the clamping member, such that rotation of the foot treadle in a first direction moves the clamp into clamping relation with the worktable, and rotation of the foot treadle in a second direction moves the clamp away from the worktable.

Romans, Dennis R.

**COMBINATION ELECTRIC TABLE SAW AND
FOLDING, MOBILE WORKBENCH**

U.S. Pat. No. 4,969,496

65 The invention relates to workbenches or the like, for supporting machine tools or other heavy equipment, and

3

more specifically to folding, mobile workbenches. The invention is a combination electric table saw and folding, mobile workbench. When unfolded, the invention consists of a rugged horizontal workbench structure held at working height by four, vertically oriented, heavy duty legs. Two of the these legs are mounted upon small wheels and in conjunction with two accessory handles which mount on the opposite side from said wheels, one side of the invention can be easily lifted and the invention moved on said wheels for positioning at the workplace. Each unfolded leg is locked into position by a pivoted dog controlled by an external handle. The legs are capable of being folded and stored within the bench frame structure. When folded, the invention may be moved easily by rolling upon a second pair of wheels attached to said bench frame structure. For storage, the invention is set with the bench frame in the vertical orientation, thereby requiring a minimum of floor space.

Otto, David L.

MITTER SAW TABLE APPARATUS

U.S. Pat. No. 5,161,590

A saw table including a housing cabinet mounting a miter saw, with the mounting platform longitudinally aligned relative to the housing cabinet. A top surface of the mounting platform is positioned below a top surface of the housing cabinet. The mounting of a miter saw table thereto provides planar alignment of the top surface of the miter saw table relative to the top wall of the housing cabinet. The housing cabinet is further provided with a plurality of compartments for the storage of various components associated with the sawing procedure. The mounting platform is provided with a rear abutment flange cooperative with forward clamp legs to secure the miter saw table relative to the mounting platform.

Pearce, Phillip W.

WORKBENCH AND WORKTABLE

U.S. Pat. No. 5,383,977

A workbench comprises a work surface disposed on a supporting structure. The work surface comprises a vice jaw member carrying a first vice jaw and a worktable, having a second complimentary vice jaw. The worktable, in a working position thereof, lies in the same plane as the jaw member, and the jaws face one another and are adapted to be moved towards and away from one another by vice operating means. The worktable is pivotally mounted with respect to the supporting structure about an axis lying adjacent the back edge of the worktable, thereby enabling the worktable to be pivoted away from the supporting structure, to give access to the underside of the worktable. The underside is provided with means for mounting at least one power tool thereon, and has several tool apertures through which working parts of the power tools can project to the upper side of the worktable for working on a workpiece presented to it, when the worktable is returned to the working position. The vice operating means enables asymmetric separation between the vice jaws.

Scott, Jr., Harry W., Britt, Randall W., Renfroe,
Kenneth L.

COMBINED BENCH AND STORAGE BOX

U.S. Pat. No. Des. 349,817

The ornamental design for a combined bench and storage box, as shown and described.

4

FIG. 1 is an isometric view showing the combined bench and storage box;

FIG. 2 is a top plan view thereof;

FIG. 3 is a side elevational view thereof;

FIG. 4 is an elevational view showing the underside thereof; and

FIG. 5 is an elevational view in line with one of the corners of the combined bench and storage box.

SUMMARY OF THE INVENTION

A primary object of the present invention is to provide a complete workstation that will overcome the shortcomings of the prior art devices.

Another object is to provide a complete workstation that offers a person a variety of options, such as an adjustable bench, a work surface, extension cords, duplex receptacles with a circuit breaker and a lighted on/off switch, to allow the person to do the total job at one time.

An additional object is to provide a complete workstation that is lightweight, but heavy-duty and durable, so that it can be easily carried by one person.

A further object is to provide a complete workstation that is simple and easy to use.

A still further object is to provide a complete workstation that is economical in cost to manufacture.

Further objects of the invention will appear as the description proceeds.

To the accomplishment of the above and related objects, this invention may be embodied in the form illustrated in the accompanying drawings, attention being called to the fact, however, that the drawings are illustrative only, and that changes may be made in the specific construction illustrated and described within the scope of the appended claims.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

Various other objects, features and attendant advantages of the present invention will become more fully appreciated as the same becomes better understood when considered in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the several views, and wherein;

FIG. 1 is a front perspective view of the instant invention shown in an operable position.

FIG. 2 is a rear perspective view taken in the direction of arrow 2 in FIG. 1, with parts broken away and the top being opened for an additional work surface.

FIG. 3 is a rear perspective view of the instant invention shown in a stored position.

FIG. 4 is a rear perspective view with the top opened for the additional work surface.

FIG. 5 is an enlarged perspective view of the area in FIG. 4 indicated by arrow 5, with parts broken away and in section.

FIG. 6 is a perspective view with parts broken away and in section, showing the instant invention in the stored position and ready to be carried by a person.

FIG. 7 is an enlarged perspective view of the area in FIG. 6 indicated by arrow 7, showing the hinge in greater detail.

Similar reference characters denote corresponding features consistently throughout the attached drawings.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Turning now descriptively to the drawings, in which similar reference characters denote similar elements

throughout the several views, FIGS. 1 through 7 illustrate a complete workstation **10** comprising a workbench **12** and a worktable **14**. A facility **16** is for supporting the worktable **14** upon the workbench **12**, so that a person **18** can utilize the workbench **12** and the worktable **14** simultaneously.

The workbench **12** includes a rectangular hollow work shelf **20** having a bottom panel **22**, a pair of side panels **24**, a pair of end panels **26** and a top panel **28**. A plurality of legs **30** extend downwardly from corners of the bottom panel **22** of the rectangular hollow work shelf **20**. The legs **30** will elevate the rectangular hollow work shelf **30** above a floor **32**. A plurality of rubber feet **34** are provided. Each rubber foot **34** is on a bottom end of each leg **30**, to stabilize the legs **30** upon the floor **32**.

The worktable **14** consists of a rectangular top **36**. A plurality of legs **38** extend downwardly from the rectangular top **36**. The legs **38** will elevate the rectangular top **36** above the top panel **28** of the rectangular hollow work shelf **20**.

The supporting facility **16** comprises the top panel **28** of the rectangular hollow work shelf **20**, having a plurality of apertures **40** therethrough adjacent corners thereof. Each aperture **40** will receive one leg **38** of the worktable **14**. An assembly **42** is for locking each leg **38** of the worktable **14** in an adjustable manner within each aperture **40** in the top panel **28** of the rectangular hollow work shelf **20**, so that the height of the worktable **14** can be adjusted with respect to the workbench **12**.

The locking assembly **42** includes each leg **38** of the worktable **14** having a plurality of longitudinal spaced apart holes **44** therethrough. Each end panel **26** of the rectangular hollow work shelf **20** has two bores **46** therethrough directly below two of the apertures **40** in the top panel **28**. A plurality of lock buttons **48** are provided. Each lock button **48**, as best seen in FIG. 5, extends through one bore **46** and into one hole **44** in one leg **38** of the worktable **14** when manually depressed.

Each leg **38** of the worktable **14** can have a plurality of side notches **50** being in alignment with each hole **44**. A plurality of V-shaped spring clips **52** can also be provided. Each V-shaped spring clip **52** is carried within one aperture **40** in the top panel **28**, to engage with one side notch **50** on one leg **38** of the worktable **14**, to be held at that position until the respective lock button **48** is engaged. A plurality of scale settings **54** are placed upon each leg **38** of the worktable **14**, so as to be utilized in adjusting and locking each leg **38** of the worktable **14** imposition.

A structure **56** is for adjusting the height of the legs **30** of the workbench **12** with respect to the bottom panel **22** of the rectangular hollow work shelf **20**. The adjusting structure **56** includes the bottom panel **22** of the rectangular hollow work shelf **20** having a plurality of apertures **58** therethrough adjacent corners thereof. Each aperture **58** will receive one leg **30** of the workbench **12**. An assemblage **60** is for locking each leg **30** of the workbench **12** in an adjustable manner within each aperture **58** in the bottom panel **22** of the rectangular hollow work shelf **20**, so that the height of the workbench **12** can be adjusted with respect to the floor **32**.

The locking assemblage **60** consists of each leg **30** of the workbench **12** having a plurality of longitudinal spaced apart holes **62** therethrough. Each end panel **26** of the rectangular hollow work shelf **20** has two bores **64** therethrough directly above two of the apertures **58** in the bottom panel **22**. A plurality of lock buttons **66** are provided. Each lock button **66** extends through one bore **64** and into one hole **62** in one leg **30** of the workbench **12** when manually depressed.

The worktable **14** further includes a rectangular leaf **68** being of a size equal to that of the rectangular top **36**. A

hinge **70** is between one longitudinal edge of the rectangular top **36** and the rectangular leaf **68**, so that the rectangular leaf **68** can fold out to an open extended position. A pair of support bars **72** extend in an adjustable manner from under the rectangular top **68** below the hinge **70**, to support the rectangular leaf **68** in its open extended position. The rectangular leaf **68** has a non-skid surface **74**, so that a person **18** can safely stand upon the rectangular leaf **68**, when the rectangular leaf **68** is folded in a closed position upon the rectangular top **36**. The side panels **24** have a plurality of recessed ports **76**, to allow the person **18** to easily step up onto the non-skid surface **74** on the rectangular leaf **68**.

A plurality of retractable power cords **78** are in the side panels **24** and the end panels **26**. A plurality of duplex electrical receptacles **80** are in the side panels **24**. An on/off switch **82** is in one end panel **24**. A circuit breaker **84** is in one end panel **24**. The workbench **12** further includes a molded carry handle **86** formed in one side panel **24**. When the workbench **12** and the worktable **14** are placed into a collapsed condition, a person **18** can grasp the carry handle **86** for transportation to another location, as shown in FIG. 6.

LIST OF REFERENCE NUMBERS

- 25 **10** complete workstation
- 12** workbench of **10**
- 14** worktable of **10**
- 16** supporting facility of **10**
- 18** person
- 30 **20** rectangular hollow work shelf of **12**
- 22** bottom panel of **20**
- 24** side panel of **20**
- 26** end panel of **20**
- 28** top panel of **20**
- 35 **30** leg of **12**
- 32** floor
- 34** rubber foot on **30**
- 36** rectangular top of **14**
- 38** leg of **14**
- 40 **40** aperture in **28** of **16**
- 42** locking assembly of **16**
- 44** hole in **38** of **42**
- 46** bore in **26** of **42**
- 48** lock button of **42**
- 45 **50** side notch in **38**
- 52** V-shaped spring clip in **40**
- 54** scale setting on **38**
- 56** adjusting structure for **30**
- 58** aperture in **20** of **56**
- 50 **60** locking assemblage of **56**
- 62** hole in **30** of **60**
- 64** bore in **26** of **60**
- 66** lock button of **60**
- 68** rectangular leaf of **14**
- 55 **70** hinge between **36** and **68**
- 72** support bar of **14**
- 74** non-skid surface on **68**
- 76** recessed port in **24**
- 78** retractable power cord in **24** and **26**
- 60 **80** duplex electrical receptacle in **24**
- 82** on/off switch in **24**
- 84** circuit breaker in **24**
- 86** molded carry handle in **24**

It will be understood that each of the elements described above, or two or more together may also find a useful application in other types of methods differing from the type described above.

While certain novel features of this invention have been shown and described are pointed out in the annexed claims, it is not intended to be limited to the details above, since it will be understood that various omissions, modifications, substitutions and changes in the forms and details of the device illustrated and in its operation can be made by those skilled in the art without departing in any way from the spirit of the present invention.

Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can, by applying current knowledge, readily adapt it for various applications without omitting features that, from the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention.

What is claimed is new and desired to be protected by Letters Patent is set forth in the appended claims:

1. A complete workstation comprising:

- a) a workbench having:
 - i) a rectangular hollow work shelf having a bottom panel, a pair of side panels, a pair of end panels and a top panel;
 - ii) a plurality of legs extending downwardly from corners of said bottom panel of said rectangular hollow work shelf, so that said legs will elevate said rectangular hollow work shelf above a floor; and
 - iii) a plurality of rubber feet, in which each said rubber foot is on a bottom end of each said leg, to stabilize said legs upon the floor;
- b) a worktable having:
 - i) a rectangular top; and
 - ii) a plurality of legs extending downwardly from said rectangular top, so that said legs will elevate said rectangular top above said top panel of said rectangular hollow work shelf; and
- c) means for supporting said worktable upon said workbench, so that a person can utilize said workbench and said worktable simultaneously, said supporting means including:
 - i) said top panel of said rectangular hollow work shelf having a plurality of apertures therethrough adjacent corners thereof, whereby each said aperture will receive one said leg of said worktable; and
 - ii) means for locking each said leg of said worktable in an adjustable manner within each said aperture in said top panel of said rectangular hollow work shelf, so that the height of said worktable can be adjusted with respect to said workbench.

2. A complete workstation as recited in claim 1, wherein said locking means includes:

- a) each said leg of said worktable having a plurality of longitudinal spaced apart holes therethrough;
- b) each said end panel of said rectangular hollow work shelf having two bores therethrough directly below two of said apertures in said top panel; and
- c) a plurality of lock buttons, wherein each said lock button extends through one said bore and into one said hole in one said leg of said worktable when manually depressed.

3. A complete workstation as recited in claim 2, wherein said locking means further includes:

- a) each said leg of said worktable having a plurality of side notches being in alignment with each said hole; and
- b) a plurality of V-shaped spring clips, each said V-shaped spring clip carried within one said aperture in said top panel, to engage with one said side notch on one said

leg of said worktable, to be held at that position until said respective lock button is engaged.

4. A complete workstation as recited in claim 3, wherein said locking means further includes a plurality of scale settings placed upon each said leg of said worktable, so as to be utilized in adjusting and locking each said leg of said worktable in position.

5. A complete workstation as recited in claim 1, further including means for adjusting the height of said legs of said workbench with respect to said bottom panel of said rectangular hollow work shelf.

6. A complete workstation comprising:

- a) a workbench having:
 - i) a rectangular hollow work shelf having a bottom panel, a pair of side panels, a pair of end panels and a top panel;
 - ii) a plurality of legs extending downwardly from corners of said bottom panel of said rectangular hollow work shelf, so that said legs will elevate said rectangular hollow work shelf above a floor; and
 - iii) a plurality of rubber feet, in which each said rubber foot is on a bottom end of each said leg, to stabilize said legs upon the floor;
- b) a worktable;
- c) means for supporting said worktable upon said workbench, so that a person can utilize said workbench and said worktable simultaneously; and
- d) means for adjusting the height of said legs of said workbench with respect to said bottom panel of said rectangular hollow work shelf, wherein said adjusting means includes:
 - i) said bottom panel of said rectangular hollow work shelf having a plurality of apertures therethrough adjacent corners thereof, whereby each said aperture will receive one said leg of said workbench; and
 - ii) means for locking each said leg of said workbench in an adjustable manner within each said aperture in said bottom panel of said rectangular hollow work shelf, so that the height of said workbench can be adjusted with respect to the floor.

7. A complete workstation as recited in claim 6, wherein said locking means includes:

- a) each said leg of said workbench having a plurality of longitudinal spaced apart holes therethrough;
- b) each said end panel of said rectangular hollow work shelf having two bores therethrough directly above two of said apertures in said bottom panel; and
- c) a plurality of lock buttons, wherein each said lock button extends through one said bore and into one said hole in one said leg of said workbench when manually depressed.

8. A complete workstation comprising:

- a) a workbench having:
 - i) a rectangular hollow work shelf having a bottom panel, a pair of side panels, a pair of end panels and a top panel;
 - ii) a plurality of legs extending downwardly from corners of said bottom panel of said rectangular hollow work shelf, so that said legs will elevate said rectangular hollow work shelf above a floor; and
 - iii) a plurality of rubber feet, in which each said rubber foot is on a bottom end of each said leg, to stabilize said legs upon the floor;
- b) a worktable having:
 - i) a rectangular top;
 - ii) a plurality of legs extending downwardly from said rectangular top, so that said legs will elevate said

- rectangular top above said top panel of said rectangular hollow work shelf;
- iii) a rectangular leaf being of a size equal to that of said rectangular top;
- iv) a hinge between one longitudinal edge of said rectangular top and said rectangular leaf, so that said rectangular leaf can fold out to an open extended position; and
- v) a pair of support bars extending in an adjustable manner from under said rectangular top below said hinge to support said rectangular leaf in its open extended position; and
- c) means for supporting said worktable upon said workbench, so that a person can utilize said workbench and said worktable simultaneously.
- 9.** A complete workstation as recited in claim 8, wherein said worktable further includes:
- a) said rectangular leaf having a non-skid surface, so that a person can safely stand upon said rectangular leaf, when said rectangular leaf is folded in a closed position upon said rectangular top; and
- b) said side panels having a plurality of recessed ports, to allow the person to easily step up onto said non-skid surface on said rectangular leaf.
- 10.** A complete workstation comprising:
- a) a workbench having:
- i) a rectangular hollow work shelf having a bottom panel, a pair of side panels, a pair of end panels and a top panel;
- ii) a plurality of legs extending downwardly from corners of said bottom panel of said rectangular hollow work shelf, so that said legs will elevate said rectangular hollow work shelf above a floor;
- iii) a plurality of rubber feet, in which each said rubber foot is on a bottom end of each said leg, to stabilize said legs upon the floor;
- iv) a plurality of retractable power cords in said side panels and said end panels;
- v) a plurality of duplex electrical receptacles in said side panels;
- vi) an on/off switch in one said end panel; and
- vii) a circuit breaker in one said end panel;
- b) a worktable; and
- c) means for supporting said worktable upon said workbench, so that a person can utilize said workbench and said worktable simultaneously.
- 11.** A complete workstation comprising:
- a) a workbench having:
- i) a rectangular hollow work shelf having a bottom panel, a pair of side panels, a pair of end panels and a top panel;
- ii) a plurality of legs extending downwardly from corners of said bottom panel of said rectangular hollow work shelf, so that said legs will elevate said rectangular hollow work shelf above a floor; and
- iii) a plurality of rubber feet, in which each said rubber foot is on a bottom end of each said leg, to stabilize said legs upon the floor;
- b) a worktable;
- c) means for supporting said worktable upon said workbench, so that a person can utilize said workbench and said worktable simultaneously; and
- d) a molded carry handle formed in one said side panel, so that when said workbench and said worktable are placed into a collapsed condition, a person can grasp said carry handle for transportation to another location.

- 12.** A complete workstation as recited in claim 1, wherein said locking means includes:
- a) each said leg of said worktable having a plurality of longitudinal spaced apart holes therethrough;
- b) each said end panel of said rectangular hollow work shelf having two bores therethrough directly below two of said apertures in said top panel; and
- c) a plurality of lock buttons, wherein each said lock button extends through one said bore and into one said hole in one said leg of said worktable when manually depressed.
- 13.** A complete workstation as recited in claim 12, wherein said locking means further includes:
- a) each said leg of said worktable having a plurality of side notches being in alignment with each said hole; and
- b) a plurality of V-shaped spring clips, each said V-shaped spring clip carried within one said aperture in said top panel, to engage with one said side notch on one said leg of said worktable, to be held at that position until said respective lock button is engaged.
- 14.** A complete workstation as recited in claim 13, wherein said locking means further includes a plurality of scale settings placed upon each said leg of said worktable, so as to be utilized in adjusting and locking each said leg of said worktable in position.
- 15.** A complete workstation as recited in claim 14, further including means for adjusting the height of said legs of said workbench with respect to said bottom panel of said rectangular hollow work shelf.
- 16.** A complete workstation as recited in claim 15, wherein said adjusting means includes:
- a) said bottom panel of said rectangular hollow work shelf having a plurality of apertures therethrough adjacent corners thereof, whereby each said aperture will receive one said leg of said workbench; and
- b) means for locking each said leg of said workbench in an adjustable manner within each said aperture in said bottom panel of said rectangular hollow work shelf, so that the height of said workbench can be adjusted with respect to the floor.
- 17.** A complete workstation as recited in claim 16, wherein said locking means includes:
- a) each said leg of said workbench having a plurality of longitudinal spaced apart holes therethrough;
- b) each said end panel of said rectangular hollow work shelf having two bores therethrough directly above two of said apertures in said bottom panel; and
- c) a plurality of lock buttons, wherein each said lock button extends through one said bore and into one said hole in one said leg of said workbench when manually depressed.
- 18.** A complete workstation as recited in claim 17, wherein said worktable further includes:
- a) a rectangular leaf being of a size equal to that of said rectangular top;
- b) a hinge between one longitudinal edge of said rectangular top and said rectangular leaf, so that said rectangular leaf can fold out to an open extended position; and
- c) a pair of support bars extending in an adjustable manner from under said rectangular top below said hinge to support said rectangular leaf in its open extended position.
- 19.** A complete workstation as recited in claim 18, wherein said worktable further includes:

11

- a) said rectangular leaf having a non-skid surface, so that a person can safely stand upon said rectangular leaf, when said rectangular leaf is folded in a closed position upon said rectangular top; and
- b) said side panels having a plurality of recessed ports, to allow the person to easily step up onto said non-skid surface on said rectangular leaf.

20. A complete workstation as recited in claim 19, wherein said workbench further includes:

- a) a plurality of retractable power cords in said side panels and said end panels;

12

- b) a plurality of duplex electrical receptacles in said side panels;
- c) an on/off switch in one said end panel; and
- d) a circuit breaker in one said end panel.

21. A complete workstation as recited in claim 20, wherein said workbench further includes a molded carry handle formed in one said side panel, so that when said workbench and said worktable are placed into a collapsed condition, a person can grasp said carry handle for transportation to another location.

* * * * *